



A WORLD LEADER IN FUME EXTRACTION TECHNOLOGY

V Oracle iQ

Last Updated on 02.02.2022



The complete, global solution for high volume arm extraction for solder applications.

The 'best in class' high-performance V Oracle has now been further enhanced with the introduction of BOFA's Intelligent Operating System (iQ), combining a range of unique features into one compact unit.

The Intelligent Operating System (iQ) performs at two distinct levels. Whilst operators benefit from the ease of operation and clarity of real-time information, the system also provides a cache of analytical data, enabling users to download performance and operating parameters for evaluation purposes.

The system takes performance parameters to a new level and helps keep maintenance downtime and ownership costs to a minimum.

More information about the [Intelligent Operating System \(iQ\)](#).

Technology



Intelligent Operating System (iQ)



DeepPleat DUO pre-filter



HEPA filter



Automatic flow control (AFC) technology



Reverse flow air (RFA) technology



Advanced carbon filter (ACF) technology



Multi voltage sensing (MVS) unit



Patented technology



ProTECT service plan



SureCHECK quality standard

Key features of the V Oracle iQ

Reverse flow filter technology
Standard

Auto sensing voltage (100-230v) - for global use
Standard

Combined HEPA / gas filter incorporating ACF technology
Standard

High contrast display
Standard

Independent filter condition monitoring, display and warnings
Standard

Airflow management system incorporating automatic flow control
Standard

DeepPleat DUO pre-filter
Standard

Filters with long life and low replacement cost
Standard

Real time airflow readings
Standard

Filter status warnings
Standard

Contact BOFA at <https://bofainternational.com/en/contact/>
<https://bofainternational.com/en/portal/datasheets/v-oracle-iq/>



Approvals: REACH and RoHS. See individual product technical data for specific accreditations

'Run safe' operation
Standard

VOC gas sensor (Volatile Organic Compound)
Optional

On-board compressor
Optional

Remote diagnostics via USB
Standard

Interfacing
Optional

Optional filter medias
Optional

Technical specification

1. iQ display

2. On / off switch

3. Power cable

4. Signal / interface cable

5. Door hinge

6. Hose inlet connection -
75mm



7. Exhaust outlet

8. Motor cooling inlet

9. Door latch



Airflow through filters

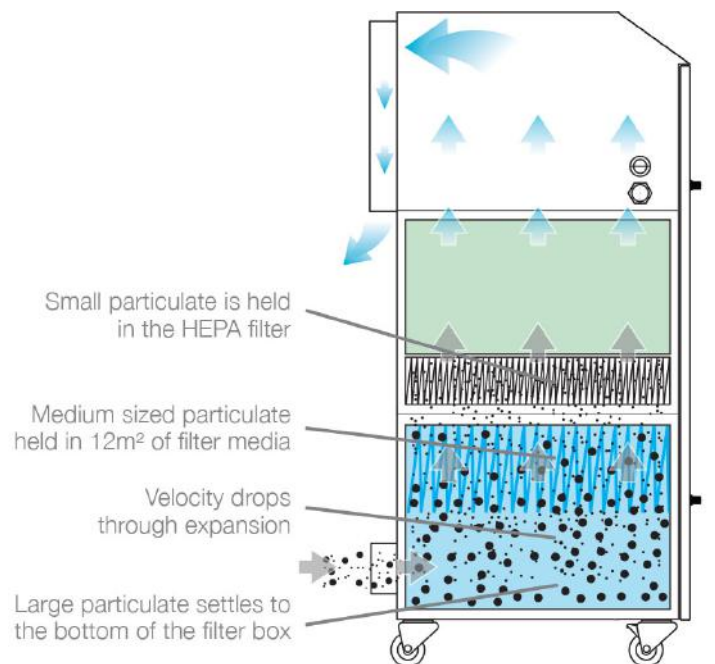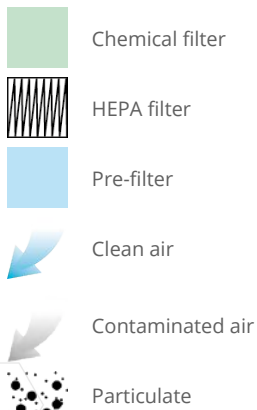

Technical data

	EU	US
Dimensions (HxWxD)	975 x 455 x 505 mm	38.39 x 17.91 x 19.88"
Cabinet construction	Brushed stainless steel / powder coated mild steel	Brushed stainless steel / powder coated mild steel
Airflow / pressure	380m ³ /hr / 96mbar	223cfm / 96mbar
Electrical data	100-230v single-phase 1~ 50/60Hz full load current: 12.5 amps / 1.1kw	100-230v single-phase 1~ 50/60Hz full load current: 12.5 amps / 1.1kw
Noise level	< 60dBA (at typical operating speed)	< 60dBA (at typical operating speed)
Weight	65kg	143lbs
Approvals	UKCA and CE	UKCA and CE

DeepPleat DUO pre-filter specifications

Surface media area	12m ² approx (129.12 ft ²)
Filter media	Borosilicate
Filter media construction	Pleated with glue bead spacers
Filter housing	Zintec mild steel
Filter efficiency	F8 (95% @ 0.9 microns)

Combined filter specifications

HEPA filter media	Borosilicate
HEPA media construction	Pleated with glue bead spacers
Filter efficiency	99.997% @ 0.3 microns
Treated activated carbon	15kgs (33 lbs)
Filter housing	Zintec mild steel

Unit part numbers

Model	Voltage	Part no.	24V stop / start	VOC monitoring	Hose kit - 75-50mm
V Oracle iQ stainless steel	90 - 257v	E2874	A2001	A2003	A1020008
V Oracle iQ powder coated	90 - 257v	E2864	A2001	A2003	A1020008

Replacement filter part numbers

Model	DeepPleat DUO pre-filter	Combined filter
V Oracle iQ	A1030400	A1030399

High volume extraction unit arm specifications

Maximum number of 32mm arms	6
Maximum number of 50mm arms, cowls or down draft trays	4

High volume extraction unit arm specifications

Maximum number of 75mm arms, cowls or down draft trays	2
(Dependent on installation)	

Other languages

V Oracle iQ

[French](#)

Datasheet correct at time of publishing.

Where applicable, the carbon used in BOFA units is capable of removing a wide range of VOCs, however it is the responsibility of the user to ensure the carbon is suitable for their application. For specific applications, please contact us for details.

Important Notice: *Many factors beyond the control of BOFA can affect the use and performance of BOFA products in a particular application, including the conditions under which the product is used. Since these factors are uniquely within the user's knowledge and control, it is essential the user evaluate the products to determine whether the product is fit for the particular purpose and suitable for the user's application. All products, product specifications, availability and data are subject to change without notice, and may vary by region or country.*

Think before you print! Please consider the environment before printing this document.

