



A Donaldson Company

AD 1500 iQ FUME EXTRACTOR

LAST UPDATED ON 01.31.2024

A WORLD LEADER IN FUME
EXTRACTION TECHNOLOGY

High-performance laser fume extraction system for heavy-duty applications in the laser marking, coding and engraving industries.

BOFA's AD 1500 iQ high-end laser extraction system combines extremely large filter capacity with high airflow and pressure rates, making it the ideal choice for heavy-duty applications that generate large amounts of particulate and gaseous organic compounds.

Performance is enhanced with the inclusion of several features including BOFA's patented DeepPleat DUO pre-filter and the acclaimed Intelligent Operating System (iQ).

These take performance and safety parameters to a new level and help keep maintenance, downtime and ownership costs to a minimum.



Intelligent
Operating
System (iQ)



DeepPleat
DUO
pre-filter



HEPA
filter



Advanced
carbon
filter (ACF)
technology



Automatic flow
control (AFC)
technology



Reverse flow
air (RFA)
technology



SureCHECK
quality
standard




Patented
technology

Key features



- Intelligent Operating System (iQ)
- High airflow and pressure rates
- Reverse flow air filter technology
- DeepPleat DUO pre-filter
- Combined HEPA/gas filter incorporating ACF technology
- Automatic flow control system
- Real-time airflow reading
- Independent filter condition monitoring, display and warnings
- High contrast display
- 'Run safe' operation
- Remote diagnostics via USB
- Filters with long life and low replacement cost
- Optional VOC gas sensor (Volatile Organic Compound)
- Optional interfacing with host laser
- Optional remote stop/start interface
- Optional filter change/system fail signal
- Optional filter medias

Technical specification

1. iQ display
2. On/off switch
3. Power cable
4. Signal interface cable
5. Castors
6. Door hinge
7. Hose inlet connection - 125mm
8. Exhaust outlet
9. Motor cooling inlet
10. Door latch
11. Motor cooling outlet
12. Standby button

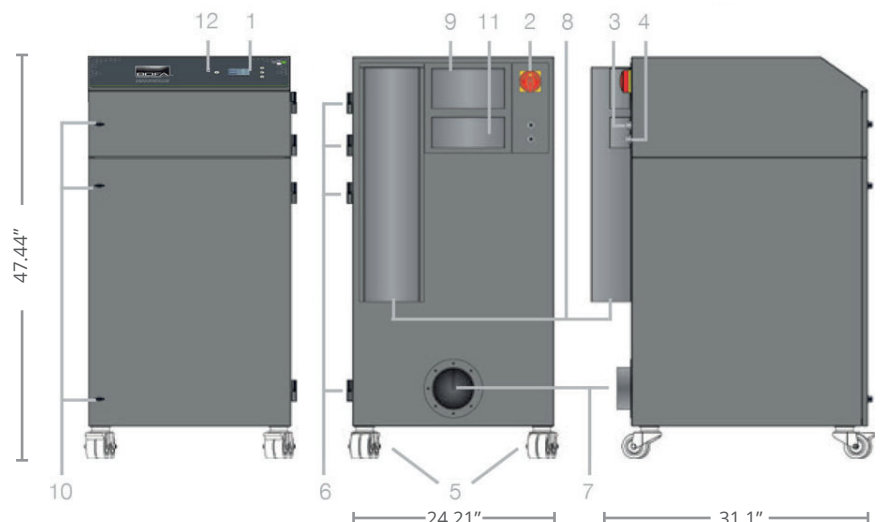

Airflow through filters

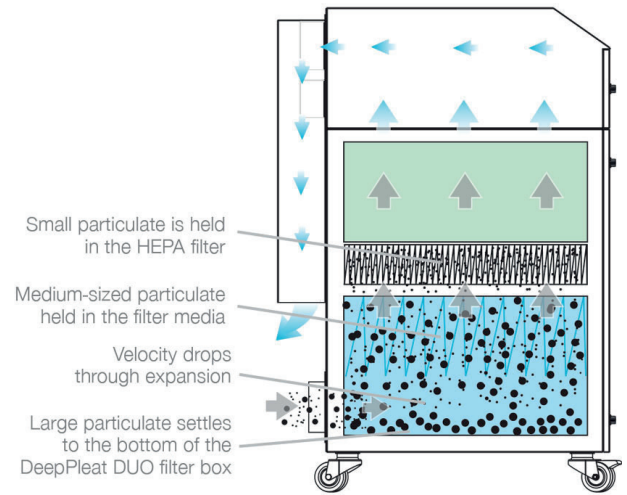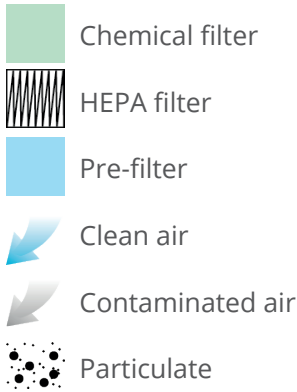

Pre-filter specifications (DeepPleat DUO)

Surface media area	approx 322.8 ft ²
Filter media	Borosilicate
Filter media construction	Maxi pleat construction with glue bead spacers
Filter housing	Zintec mild steel
Filter efficiency	95% @ 0.9 microns
Inlet size	125mm (0.41 ft)
Dropout chamber size	58 liters
Filter media pleat size	200mm (0.65 ft)

Technical data

Dimensions (HxWxD)	47.44 x 24.21 x 31.10"
Cabinet construction	Brushed stainless steel/Powder coated mild steel
Airflow/pressure	735cfm/100mbar
Electrical data	230v single-phase 1~ 50/60Hz full load current: 24 amps/3.3kw
Noise level	< 68 dBA (at typical operating speed)
Weight (standard extractor with filters)	322lbs (+/- 5%)
Approvals	UKCA, CE and cUL, UL*

Combined HEPA/gas filter specifications

Surface media area	7.5m ² approx (80.7 ft ²)
HEPA filter media	Borosilicate
HEPA media construction	Maxi pleat construction with glue bead spacers
Filter housing	Zintec mild steel
Treated activated carbon	74.8 lbs
HEPA filter efficiency	99.995% @ 0.3 microns

* Tested to UL and cUL standards, but testing may be provided by alternate nationally recognized test laboratories. Certain product configurations may affect the UL certification. Please speak to your sales representative.

Contact BOFA at bofainternational.com/contact

Datasheet correct at time of publishing.

Where applicable, the carbon used in BOFA units is capable of removing a wide range of VOCs, however it is the responsibility of the user to ensure the carbon is suitable for their application. For specific applications, please contact us for details.

Important notice: Many factors beyond the control of BOFA can affect the use and performance of BOFA products in a particular application, including the conditions under which the product is used. Since these factors are uniquely within the user's knowledge and control, it is essential the user evaluate the products to determine whether the product is fit for the particular purpose and suitable for the user's application. All products, product specifications, availability and data are subject to change without notice, and may vary by region or country.

Think before you print! Please consider the environment before printing this document.

Part numbers

Model	AD 1500 iQ - Powder-coated
Part number	1U15811504-1419
Including 24v stop / start and filter change signal	1U630811504-1419
Optional VOC	1UA1070028
Single hose kits	1USHK-5-(3,4,5,6)
Dual hose kits	1UDHK-5-(3,4,5,6)
Optional exhaust spigot 125mm* replaces exhaust box vent	1UA1060029
Replacement filters	
Pre-filter (DeepPleat DUO)	1UA1030222
Combined HEPA / gas filter	1UA1030297

Find out more



Approvals: REACH and RoHS.
See individual product technical data for specific accreditations

