



A Donaldson Company

FUMECAB 700 FUME EXTRACTOR

LAST UPDATED ON 07.23.2024

A WORLD LEADER IN FUME
EXTRACTION TECHNOLOGY

Partial enclosures are becoming the recommended extraction option for a variety of applications.

The innovative cam filter change design helps enable safer and simple front loading filter replacement and provides many benefits over alternative rear access systems. Ultra-bright, slimline, energy saving LED lights and UV lighting come as standard, along with VOC monitoring.



HEPA
filter



Advanced
carbon
filter (ACF)
technology



Automatic flow
control (AFC)
technology



Reverse flow
air (RFA)
technology



SureCHECK
quality
standard






Patented
technology

Key features

- Certified to BS 7989:2001 - recirculatory filtration fume cabinet specification
- Helps to ensure operational compliance with HSG258 guidelines
- Auto-sensing flow control
- Energy saving, ultra-bright, slimline LED lighting
- Twin-coated anti-UV/anti-splash protective polycarbonate visor
- Low noise level
- Large working area
- Side entry blind grommets for equipment access
- Audible and visual warning alarms
- VOC gas sensor (volatile organic compound)
- UV lighting
- Optional stand

Technical specification


1. Unit/filter condition display - automatic flow control
2. On/off switch
3. Filter compartment hinges
4. Cable entry grommet
5. Transparent visor
6. Transparent visor hinges
7. Power cable inlet
8. Internal LED lighting
9. Exhaust outlet
10. LED/UV light switch

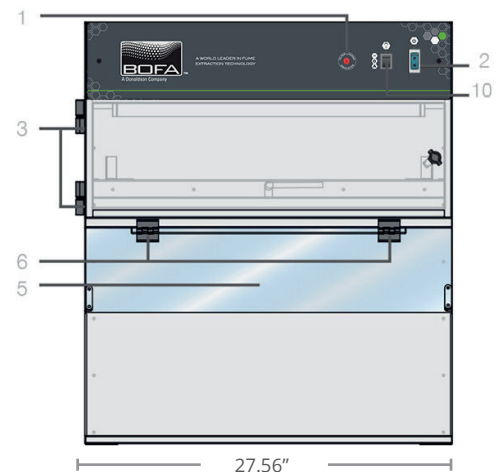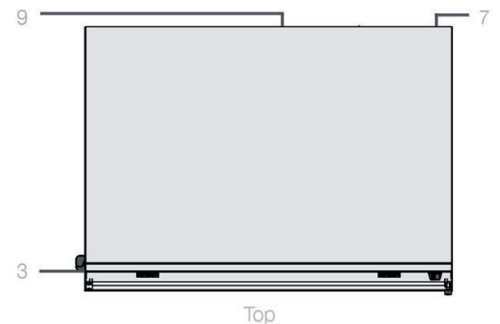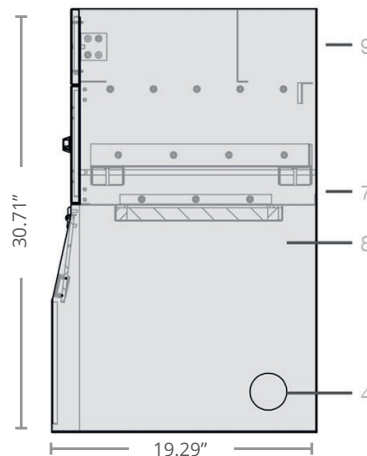

Airflow through filters



Internal working area

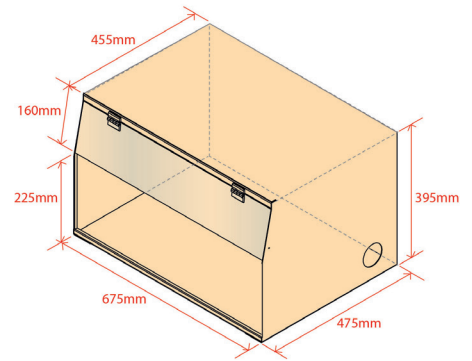

Technical data

| | |
|--|--|
| Dimensions (HxWxD) | 30.71 x 27.56 x 19.29" |
| Opening dimensions (HxWxD) | 26 x 8.8" |
| Face velocity | 78.7ft/min |
| Face velocity | 0.5m/s (100ft/min) |
| Max face velocity | 0.6m/s (118ft/min) |
| Cabinet construction | Powder-coated mild steel |
| Electrical data | 115v 50/60Hz Full load current: 3 amps |
| Noise level | < 55 dBA (at typical operating speed) |
| Weight (standard extractor with filters) | 143lbs (+/- 5%) |
| Exhaust outlet (optional) | 100mm |
| Approvals | UKCA and CE |

Contact BOFA at bofainternational.com/contact

Datasheet correct at time of publishing.

Where applicable, the carbon used in BOFA units is capable of removing a wide range of VOCs, however it is the responsibility of the user to ensure the carbon is suitable for their application. For specific applications, please contact us for details.

Important notice: Many factors beyond the control of BOFA can affect the use and performance of BOFA products in a particular application, including the conditions under which the product is used. Since these factors are uniquely within the user's knowledge and control, it is essential the user evaluate the products to determine whether the product is fit for the particular purpose and suitable for the user's application. All products, product specifications, availability and data are subject to change without notice, and may vary by region or country.

Think before you print! Please consider the environment before printing this document.

Pre-filter specifications

| | |
|---------------------------|-------------------|
| Filter media construction | Filter pad |
| Filter efficiency | 99% @ 0.3 microns |

Combined HEPA/gas filter specifications

| | |
|--------------------------|--|
| HEPA filter media | Borosilicate |
| HEPA media construction | Maxi pleat construction with glue bead spacers |
| Gas filter | Treated activated carbon |
| Treated activated carbon | 22 lbs |
| Filter efficiency | 99.995% @ 0.3 microns |

Part numbers

| | |
|------------------------------|-----------------------------|
| Model | FumeCAB 700 - Powder-coated |
| Includes UV lighting and VOC | As standard |
| Part number | 1U42003180850561-1447 |
| Replacement filters | |
| Pre-filter | 1UA1030269 |
| Combined HEPA/gas filter | 1UA1030270 |

Find out more



Approvals: REACH and RoHS.
See individual product technical data for specific accreditations.

