

AD 1500 iQ Dual Arms

Fume Extraction System - Advantage Range

Datasheet

Technical Specification and Product Information

A mobile dual-arm system for heavy-duty laser applications.

The AD 1500 iQ Dual Arms is a powerful, mobile fume extraction system designed for heavy-duty laser applications. Building upon the established AD 1500 iQ extraction system, it features dual articulated arms with a reach of over 6 feet (2 metres)* and an integrated spark arrestor for enhanced safety and performance.

FEATURES

- Dual articulated arms
- Integrated spark arrestor
- Real-time airflow reading
- Independent filter condition monitoring
- · High contrast display
- Remote diagnostics via USB


 Long-life, low-cost replacement filters

- Extended exhaust box to help reduce noise and air dispersion
- Adjustable arm valves for precise airflow control



Approvals: UKCA and CE \mid cUL \mid UL**

TECHNICAL SPECIFICATION

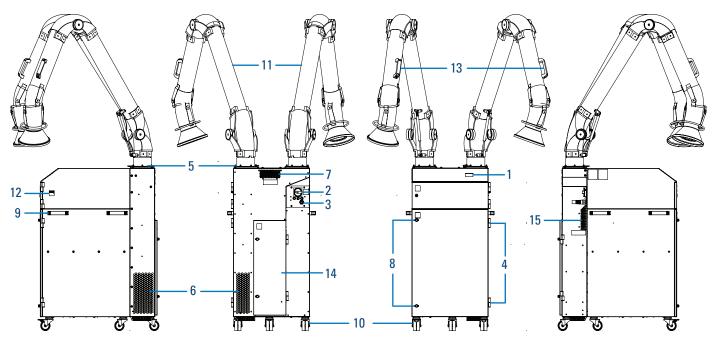

- 1. iQ display
- 2. On/off switch
- 3. Power cable
- 4. Door hinges
- 5. Extraction system arm inlet spigots
- 6. Exhaust outlet
- 7. Blower cooling inlet
- 8. Door latches
- 9. System handles
- 10. Castors

- 11. Extraction system arms
- 12. USB port
- 13. Extraction system arm handles
- 14. Spark arrestor chamber
- 15. Blower cooling outlet

TECHNICAL DATA

Voltage	Settable range		Pressure (+/- 10%)	Dimensions (H x W x D)		Weight*** (+/- 5%)		Noise level****	Frequency	Full load current
V	cfm	m³/hr	mbar	in	mm	lbs	kg	dB(A)	Hz	amps
415 3 ph	294-677	500-1150	86	47.4 x 27.2 x 37.5	1205 x 692 x 952	529	240	< 80	50/60	8.5 Ph / 14.5 A N

AIRFLOW





HEPA filter



Chemical filter



Clean filtered air



Contaminated air

FILTER SPECIFICATIONS

ft2

322.8

80.7

Surface media area

(approx)

m²

30

7.5

Activated carbon volume

ltr

53.7



Particulate

Model

DeepPleat


DUO pre-filter

Combined

filter (HEPA)

Model

Combined filter (gas)

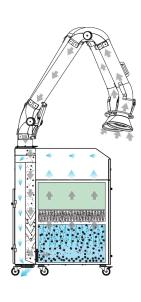

Filter

efficiency

ePM1 70%

99.995%@

0.3 microns

PART NUMBERS - FILTERS

DeepPleat DUO pre-filter	Combined filter
1UA1030222	1UA1030297

PART NUMBERS - SYSTEM

Description	Part number
Powder-coated, 415 V No options	1U45812198-2181-EU

CONFIGURATION

Cabinet construction

Powder-coated mild steel (RAL7016)

Compatible accessories:

Spark arrestor included as standard

Power cables

Commando plug (415 V)

* Arms are fixed to rotate no more than 180°.

Datasheet correct at time of publishing. Where applicable, the carbon used in Donaldson BOFA systems is capable of removing a wide range of VOCs, however it is the responsibility of the user to ensure the carbon is suitable for their application. For specific applications, please contact us for details.

Many factors beyond the control of Donaldson can affect the use and performance of Donaldson products in a particular application, including the conditions under which the product is used. Since these factors are uniquely within the user's knowledge and control, it is essential the user evaluate the products to determine whether the product is fit for the particular purpose and suitable for the user's application. All products, product specifications, availability and data are subject to change without notice, and may vary by region or country.



Approvals: REACH and RoHS. See invididual product technical data for specific accreditations



Donaldson BOFA

Tel. +44 (0) 1202 699 444 Email. bofasales@donaldson.com Web. donaldsonbofa.com

Germany Email. bofavertrieb@donaldson.com USA Tel. +1 (618) 205 5007

Email. bofasalesus@donaldson.com

^{**}cUL | UL: Tested to the appropriate standards, but testing may be provided by alternate nationally recognized test laboratories. Certain product configurations may affect the certification. Please speak to your sales representative.

^{***}Weight including arms and filters.

^{****}Noise level: At typical operating speed.