

## AD 1000 iQ

Fume Extraction System - Advantage Range

### Datasheet

Technical Specification and Product Information

## A system for medium to heavy-duty laser applications.

The AD 1000 iQ fume extraction system is a perfect choice for medium to heavy-duty applications that generate large amounts of particulate. With a greater airflow than the AD 500 iQ, it also offers significant filter capacity.


### FEATURES

- Real-time airflow reading
- Independent filter condition monitoring
- High contrast display
- Remote diagnostics via USB
- Long-life, low-cost replacement filters

Approvals: UKCA and CE | cUL | UL\*



### TECHNICAL SPECIFICATION

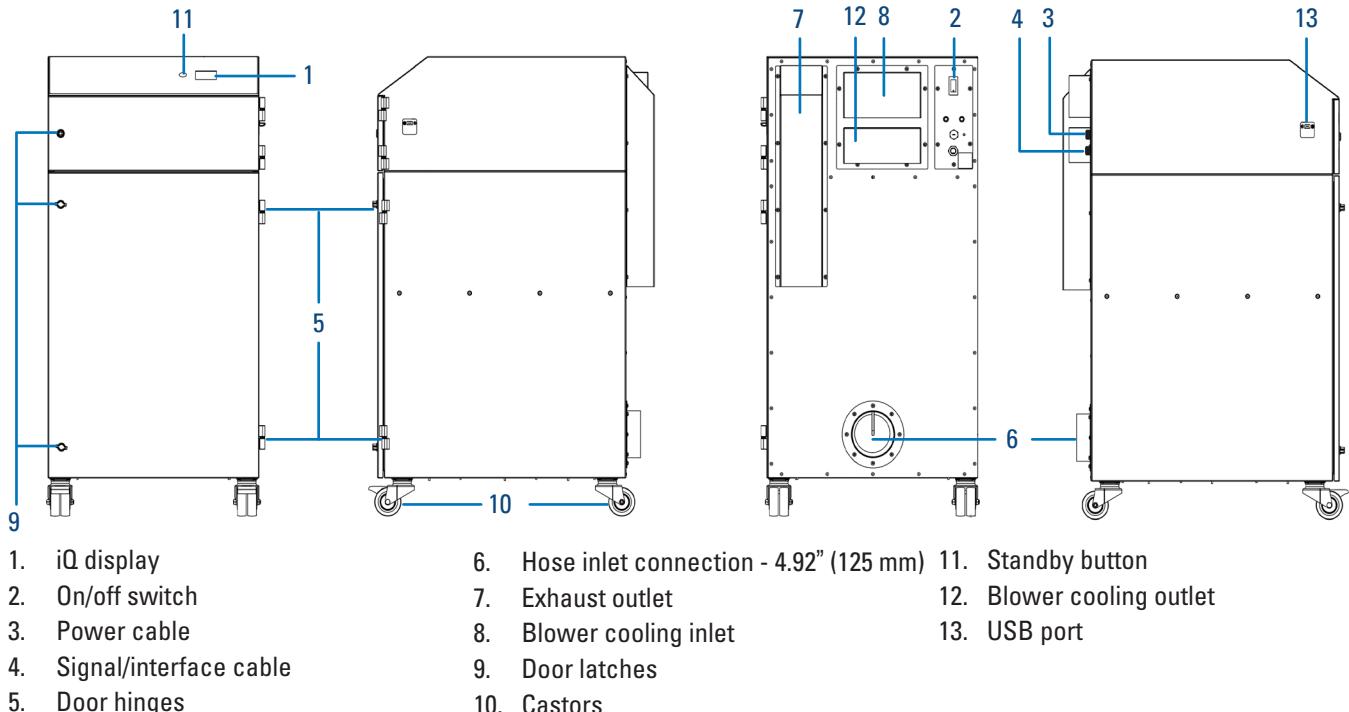


1. iQ display
2. On/off switch
3. Power cable
4. Signal/interface cable
5. Door hinges
6. Hose inlet connection - 4.92" (125 mm)
7. Exhaust outlet
8. Blower cooling inlet
9. Door latches
10. Castors
11. Standby button
12. Blower cooling outlet
13. USB port

### TECHNICAL DATA

Voltage	Unrestricted airflow** (+/- 10%)	Settable airflow range***		Pressure (+/- 6%)	Dimensions (H x W x D)			Weight (+/- 5%)		Noise level****	Frequency	Full load current
V	cfm	m³/hr	cfm	m³/hr	mbar	in	mm	lbs	kg	dB(A)	Hz	amps
115	515	875	177-430	300-730	65	47.4 x 24.4 x 31.1	1205 x 620 x 790	324	147	< 70	50/60	19.5
230			177-459	300-780	60							12.5

## AIRFLOW

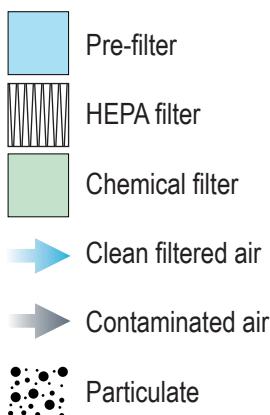

## PART NUMBERS - SYSTEM

Description	Part number
Powder-coated, 230 V No options	1U30811503-A-1419
Powder-coated, 230 V No option, USA plug	1U30811503-A-1419-US
Powder-coated, 230 V 24 V S/S, SOK, USA plug	1U630811503-A-1419-US
Powder-coated, 230 V 24 V S/S, SOK, O/R	1U4680811503-A-1419
Powder-coated, 115 V No options	1U10810503-A-1419
Powder-coated, 115 V 24 V S/S, SOK, O/R	1U4665810503-A-1419
Powder-coated, 115 V 24 V S/S, SOK, O/R, USA plug	1U4665810503-A-1419-US
Stainless steel, 230 V 24 V S/S and SOK	1U630106503-A-1419

## FILTER SPECIFICATIONS

Model	Surface media area (approx)		Filter efficiency
	ft <sup>2</sup>	m <sup>2</sup>	
DeepPleat DUO pre-filter	322.8	30	F8 50% @ 0.3 microns
Combined filter (HEPA)	80.7	7.5	99.995% @ 0.3 microns
Activated carbon volume			
litr			
Combined filter (gas)	53.7		

## PART NUMBERS - FILTERS

DeepPleat DUO pre-filter	Combined filter
1UA1030222	1UA1030297

## CUSTOMIZATIONS

<b>Options</b>	<b>Power cables</b>
Power cables	Type B
Remote stop/start signal (S/S)	Type E
System OK signal (SOK)	Type G
Override (O/R)	Type free ends
VOC sensor	
Exhaust box/exhaust spigot	
<b>Cabinet construction</b>	<b>Compatible accessories:</b>
Brushed stainless steel	Spark Arrestor 2
Powder-coated mild steel (RAL7016)	ILF 600

\*cUL | UL: Tested to the appropriate standards, but testing may be provided by alternate nationally recognized test laboratories. Certain product configurations may affect the certification. Please speak to your sales representative.

\*\* Unrestricted airflow: The airflow values provided with clean filters, no hose kit, at 230 V, measured by using a wind vane. The numbers may vary depending on voltage and test procedure used.

\*\*\* Settable range: Donaldson BOFA recommends utilizing the lowest flow rate that achieves the correct capture velocity for your application in order to maximize filter life.

\*\*\*\* Noise level: At typical operating speed.

Datasheet correct at time of publishing. Where applicable, the carbon used in Donaldson BOFA systems is capable of removing a wide range of VOCs, however it is the responsibility of the user to ensure the carbon is suitable for their application. For specific applications, please contact us for details.

### Important Notice

Many factors beyond the control of Donaldson can affect the use and performance of Donaldson products in a particular application, including the conditions under which the product is used. Since these factors are uniquely within the user's knowledge and control, it is essential the user evaluate the products to determine whether the product is fit for the particular purpose and suitable for the user's application. All products, product specifications, availability and data are subject to change without notice, and may vary by region or country.



Approvals: REACH and RoHS. See individual product technical data for specific accreditations.

**Donaldson**  
**BOFA**

### Donaldson BOFA

#### UK & ROW

Tel. +44 (0) 1202 699 444  
Email. [bofasales@donaldson.com](mailto:bofasales@donaldson.com)  
Web. [donaldsonbofa.com](http://donaldsonbofa.com)

#### Germany

Email. [bofavertrieb@donaldson.com](mailto:bofavertrieb@donaldson.com)

#### USA

Tel. +1 (618) 205 5007  
Email. [bofasalesus@donaldson.com](mailto:bofasalesus@donaldson.com)

ENG (January 2025) Donaldson BOFA AD 1000 iQ Datasheet. ©2011-2025 Donaldson Company, Inc. Donaldson, Torit, Dalamatic, Delta P, Delta P Plus, Downflo, Dura-Life, Easy Duct, PowerCore, Synteq XP, Ultra-Web, Unimaster and the color blue are marks of Donaldson Company, Inc. All other marks belong to their respective owners.